
ARAKNO MINI - SUPPORTO PER VIDEOPROIETTORI FINO A 20KG, BIANCO

CODICE: 09505

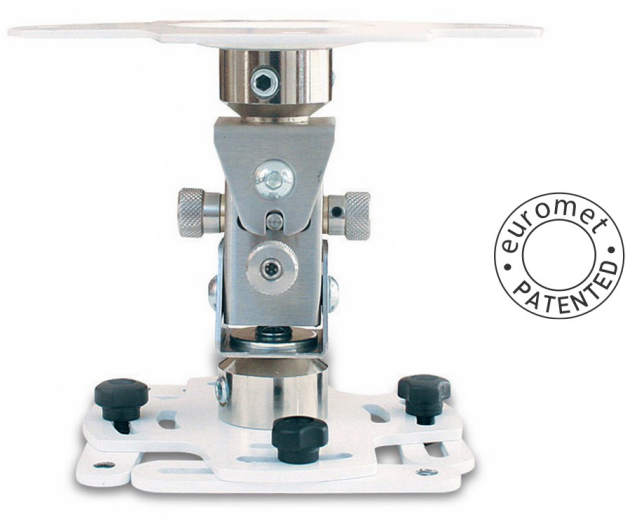

Tipologia	Da Soffitto
CARICO MASSIMO	20 kg
Dimensioni max	192x192x148 mm, 192x192x140 mm
Angolo di inclinazione	fino a 30°
Swivel	360°
Peso spedizione	2,6 kg
Fixing screws	M2.5 M3 M4 M5

Categorie: Arakno, Supporti Videoproiettori

Colore: Bianco

- Più piccolo e leggero utile per carichi leggeri e precisione di posizionamento
- Soluzione per pesi fino a 20 kg riducendo la distanza proiettoresoffitto
- Sistema di inclinazione con meccanismo brevettato

Disponibile anche nelle varianti di colore:

- **Nero (Cod: 09504)**
- **Grigio (Cod: 09503)**

RICHIEDI UN'OFFERTA

×

RICHIEDI UN'OFFERTA

Nome *

Cognome *

Azienda *

Email *

Messaggio *

☐Ho letto l'informativa sulla Privacy Policy e autorizzo il trattamento dei dati personali (*)
Leggi la nostra Privacy Policy

Invia

×

GALLERY



Intertek

VERIFICATION
of conformity with European Directives

Job No.	4126
Type of equipment:	Wall mounted LCD support
Applicant / Importer:	Euromet S.r.l. Zona Industriale Brodolini 60025 Loreto (AN) - Italy
Manufacturer / Importer:	**(same as applicant)**
Type designation:	Arakno
Ratings:	Arakno: Max load supported 45 Kg

Standard(s) used for showing compliance with the essential requirements in the specified directive(s):


Standard(s)	*Test report(s)*	*Issued by*	*Date(s)*
EN 60065: 2002 Cl. 19.6	1090001UDI-003	**Intertek Italia s.r.l.**	**January 16, 2009**


The referred test report(s) show that the product complies with standard(s) recognized as giving presumption of compliance with the essential requirements in the specified EU Directive(s). After preparation of the necessary technical documentation as well as the conformity declaration the CE marking can be affixed on the equipment. Other relevant Directives have to be observed.

Campoformido, January 16, 2009

Arianna Fogar
Operations Manager

INTERTEK ITALIA s.r.l.
via Principe di Udine, 114 – Campoformido (UD), Italy
Tel: +39 0432 653411, Fax: +39 0432 653499 - www.intertek-etlsemko.com



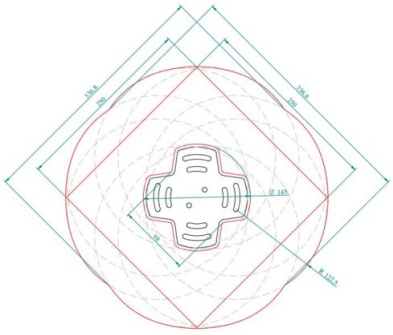

compatible with M2.5, M3, M4, M5 holes

